


| You are in: [Lozier](#) > [Products](#) > [Tear Drop Beam Shelf Support](#)

Tear Drop Beam Shelf Support

Part Number: **TBSS**

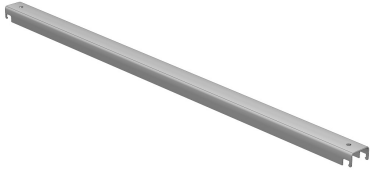

Product Details:

- Features “U” shaped design which hooks into slots in the pallet rack beams
- Required for all applications using load bearing shelves
- Nominal lengths correspond to nominal depths of conventional Pallet Rack Uprites

Shelf Supports (in conjunction with particleboard/wire shelves) are required when levels are hand loaded or when palletized loads do not rest on front and back beams (or when pallets do not have sufficient strength to support the load in this fashion).

Product Options and Numbers

Example Part #: **TBSS 36 GLV**

Tear Drop Beam Shelf Support: **TBSS**

Length: **36"**, 42", 48"

Standard Finish: **GLV**

Suffix Key

GLV

- Galvanized

Available Capacity on Flat Wire Decking or Particleboard
Using the Number of Pallet Rack Supports Included

NOTE: The rated load capacity per pair of beams must be equal to or exceed the rated shelf capacity

| Frame Depth | Beam Length | # Of TBSS Supports | | | # Of TBSSH Supports | | |
|-------------|-------------|--------------------|------|------|---------------------|------|------|
| | | 3 | 4 | 6 | 3 | 4 | 6 |
| 36" | 48" | 2625 | X | X | 3000 | X | X |
| | 72" | 2625 | 3500 | X | 3000 | 4000 | X |
| | 93" | X | 3500 | 5250 | X | 4000 | 6000 |
| | 96" | X | 3500 | 5250 | X | 4000 | 6000 |
| | 99" | X | 3500 | 5250 | X | 4000 | 6000 |
| | 102" | X | 3500 | 5250 | X | 4000 | 6000 |
| | 108" | X | 3500 | 5250 | X | 4000 | 6000 |
| | | | | | | | |
| 42" | 48" | 2175 | X | X | 3000 | X | X |
| | 72" | 2175 | 2900 | X | 3000 | 4000 | X |
| | 93" | X | 2900 | 4350 | X | 4000 | 6000 |
| | 96" | X | 2900 | 4350 | X | 4000 | 6000 |
| | 99" | X | 2900 | 4350 | X | 4000 | 6000 |
| | 102" | X | 2900 | 4350 | X | 4000 | 6000 |
| | 108" | X | 2900 | 4350 | X | 4000 | 6000 |
| | | | | | | | |
| 48" | 48" | 1875 | X | X | 3000 | X | X |
| | 72" | 1875 | 2500 | X | 3000 | 4000 | X |
| | 93" | X | 2500 | 3750 | X | 4000 | 6000 |
| | 96" | X | 2500 | 3750 | X | 4000 | 6000 |

| | | | | | | | |
|--|------|---|------|------|---|------|------|
| | 99" | X | 2500 | 3750 | X | 4000 | 6000 |
| | 102" | X | 2500 | 3750 | X | 4000 | 6000 |
| | 108" | X | 2500 | 3750 | X | 4000 | 6000 |

Beam capacities based on even weight distribution